

DYNAPAC



Part of the Atlas Copco Group

CC800

Double drum vibratory rollers



Technical data

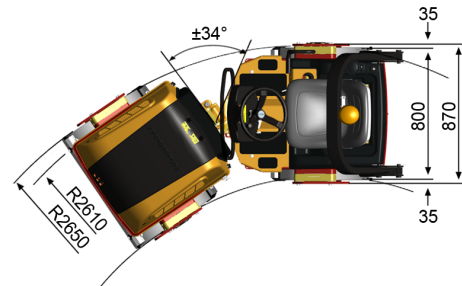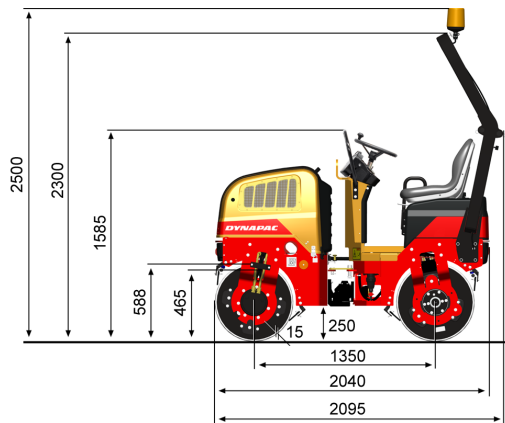

Masses		CC800
Max. operating mass		1,665 kg
Operating mass (incl. ROPS)		1,575 kg
Module mass (front/ rear)		740/ 835 kg
Traction		
Speed range		0-6
Vertical oscillation		±13°
Theor. gradeability		40 %
Compaction		
Centrifugal force		17 kN
Nominal amplitude		0.4 mm
Static linear load (front/ rear)		9.3/ 10.0 kg/ cm
Vibration frequency		70 Hz
Water tank		110 l
Engine		
Manufacturer/ Model		Perkins 403D-11
Type		Water cooled diesel
Rated power, SAE J1995		17 kW (23.5 hp) @ 2,600 rpm
Fuel tank capacity		23 l
Hydraulic system		
Driving		Axial piston pump with variable displacement and servo. 2 radial piston motors with constant displacement.
Vibration		Gear pump/ motors with constant displacement.
Steering		Gear pump with constant displacement.
Service brake		Hydrostatic in forward and reverse lever.
Parking/ Emergency brake		Failsafe brake in both drums.

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.